The #1 Selling Deadbolt Just Got an Upgrade

Now Featuring SMARTKEY™

Easy to Install

Security at a Value

Features SmartKey™ with BumpGuard™

ANSI/BHMA Grade 3 Certified Quality & Security

Kwikset®

660 Deadbolt

Specifications:

Door Prep	Cross Bore 2 1/8". Edge Bore 1". Latch face 1" x 2 1/4".
Backset	Adjustable to 2 3/8" or 2 3/4" standard.
Door Thickness	1 3/8" – 1 3/4" doors standard.
Cylinder	SmartKey™ or 5-Pin Pin & Tumbler.
Faceplates	1" x 2 1/4". Specify round corner, square corner or drive-in.
Strikes	1" x 2 1/4" full. Specify round corner or square corner. Other options available.
Bolt	1" throw.
Door Handing	Reversible for right or left-hand doors.
ANSI/BHMA	A156.2 Grade 3
ADA	Interior turn piece meets 4.13.9 ADA requirements.
UL	N/A

Functions:



660 Single Cylinder:
Deadbolt operated by key outside and thumb turn inside.



665 Double Cylinder:
Deadbolt operated by key both sides.

Dimensions:

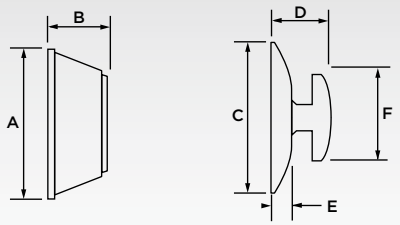

Design	A	B	C	D	E	F
660	2 1/2"	1 1/8"	2 1/2"	1"	3/8"	1 3/4"
665	2 1/2"	1 1/8"	2 1/2"	1 1/8"		

SMARTKEY™

Featuring BumpGuard™

INCREASE EFFICIENCY

SAVE TIME & MONEY

ADD SECURITY WITH KEY CONTROL

EASILY RE-KEY IN THREE EASY STEPS

Insert functioning key and turn 1/4 turn clockwise.

Insert and remove the SmartKey learn tool. Remove functioning key.

Insert new key and turn 1/2 turn counter-clockwise. Your lock is now re-keyed!

Finishes:

19701 DaVinci • Lake Forest, CA 92610 • www.kwikset.com • 1-800-327-LOCK

© 2008 Kwikset Corporation, Lake Forest, CA 92610

LIT 7-1-90 10/08 14838